

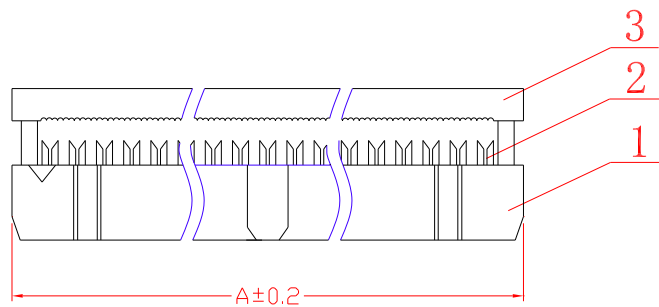
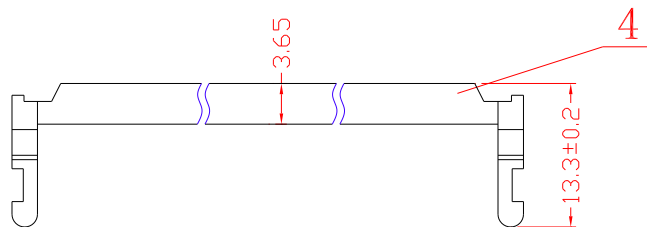


序号/RevNo.	名称/Title	文件编号/File No.
1	塑件主体	QJ/XYT-11113
2	端子	QJ/XYT-11114
3	中盖	QJ/XYT-11112
4	反折盖	QJ/XYT-11111

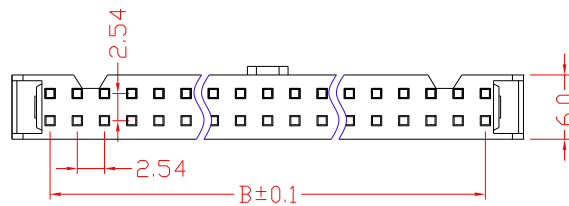

Specifications:

Contact Resistance: 30mΩ max.at DC 100 mA

Insulator Resistance: 1000MΩ min.at DC 500V

Current Rating: 1AMP

Dielectric Withstanding

Voltage: AC 1000V For 1 minute

Operating Temperature:-55°C--+105°C

Contact: Phosphor bronze

Housing: PBT &30% Glass Fiber(UL 94V-0)

Position	A	B
8	14.73	7.62
10	17.27	10.16
14	22.35	15.24
16	24.89	17.78
20	29.97	22.86
26	37.59	30.48
30	42.67	35.56
34	47.75	40.64
40	55.37	48.26
50	68.07	60.96
60	80.77	73.66
64	85.85	78.74

设计/Designed by	绘图/Drawing by	审核/Checked by	批准/Approved by	未注公差 General Tolerance	
 新亚联合科技 XINYA UNITED TECH CO.,LTD.	110产品图	图名/Title	文件编号/File No.	X. ±0.2	X." ±2"
		110产品图	QJ/XYT-12018	.X ±0.1	.X" ±1"
				.XX ±0.05	.XX" ±0.5"
				.XXX ±0.01	
备注/Remark	页序/Sheet	单位/Units: mm			

序号/RevNo.	更改记录/Revision note	签名/Signature	日期/Date
-----------	--------------------	--------------	---------