

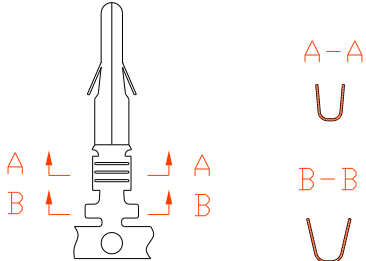


Specifications:
Contact Resistance: 10mΩ max
Insulator Resisitance: 1000MΩ min
Dielectric Strength: AC 1500V For 1 minuteRated
Current : 13-8AMP
Rated Voltage: 300V/AC

Material:
Housing: Nylon UL94V-0
Contact: Brass(Tin Plated)


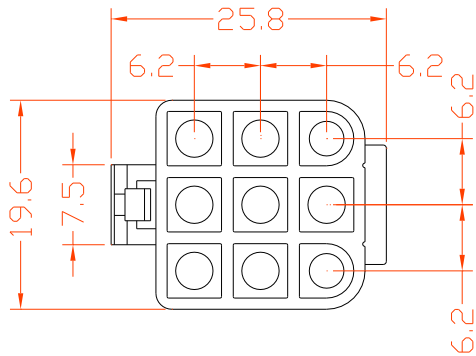


Sample									
Type	142-01M	142-02M	142-03M	142-04MN	142-04M	142-06M	142-09M	142-12M	142-15M
Current rating	13A	13A	11A	11A	11A	8A	8A	8A	8A

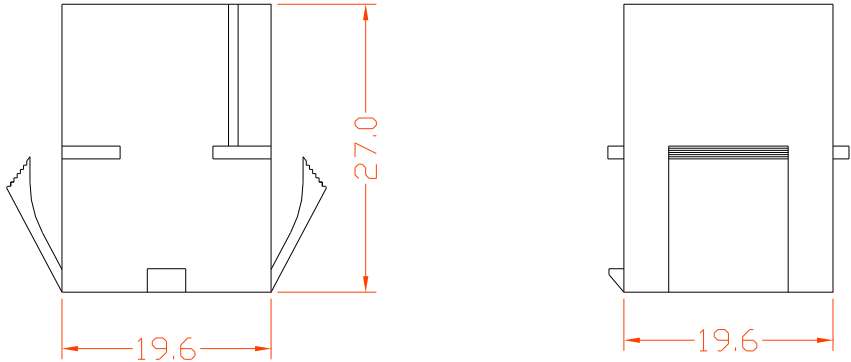

Specifications:
Contact Resistance: 10mΩ max
Insulator Resisitance: 1000MΩ min
Dielectric Strength: AC 1500V For 1 minuteRated
Current : 13-8AMP
Rated Voltage: 300V/AC

Material:
Housing: Nylon UL94V-0
Contact: Phosphor Bronze(Tin Plated)

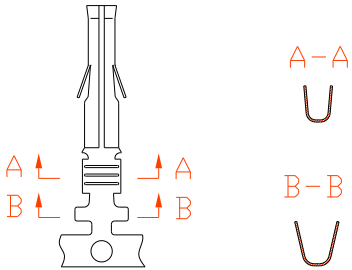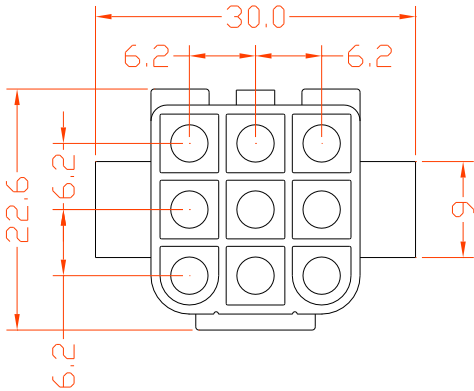

Sample									
Type	142-01F	142-02F	142-03F	142-04FN	142-04F	142-06F	142-09F	142-12F	142-15F
Current rating	13A	13A	11A	11A	11A	8A	8A	8A	8A