



HAHN - Elektrobau GmbH & Co. KG

Bellersheimerstraße 45
35410 Hungen
Germany

phone: +49 (0) 6402/808-0
fax: +49 (0) 6402/808-60
email: info@hahn-trafo.de

Data sheet: BV 201 0145

Size 1 a: height 15 mm	Type BV 201...	0,35 VA
------------------------	----------------	---------

shipping unit per box: **50 pcs.** / temperature class: **ta 70/B** / weight: **approx. 25g**

- absolutely short circuit proof

- **excellent function at thermal changes, vacuum casted**

- maximum safety and long-term durability

- **with VDE-, ENEC 10-, UL-, and CSA certificates**


- minimum size, maximum capacity

- **self-extinguishing cast housing and sealing material**

- individually tested with certificate

Article no. BV	Output ta 70°C/B	prim.V	Connecting pins	Operating point sec. ± 5%	Connecting pins	No-load voltage V ± 5%
BV 201 0145	0,35	230	1-4	12 V 29 mA	6-7	20,8

Certificates

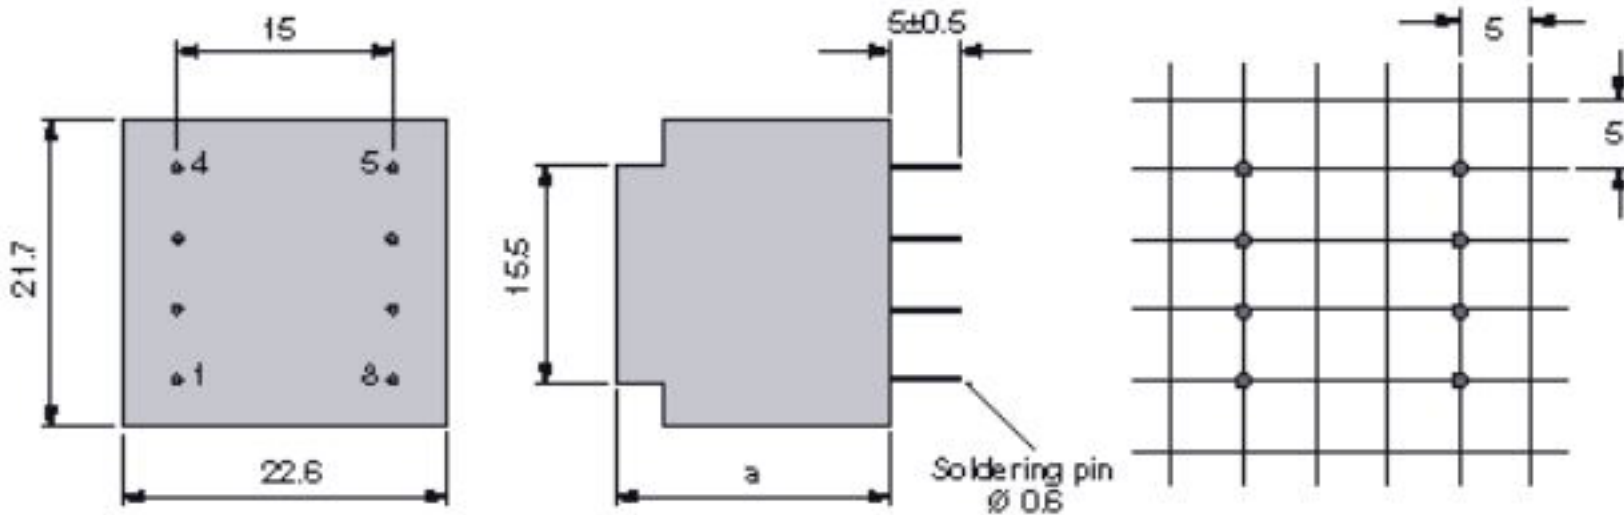

Dimensions with no indication of tolerances: ± 0,3 mm