



HAHN - Elektrobau GmbH & Co. KG
Bellersheimerstraße 45
35410 Hungen
Germany

phone: +49 (0) 6402/808-0
fax: +49 (0) 6402/808-60
email: info@hahn-trafo.de

Data sheet: BV EI 302 2025

Size 2 a: height 21.8 mm	1,5 VA	ta 70/F	BV EI 302 ...
--------------------------	--------	---------	---------------

Several hundreds of typen provide high electrical safety and long service-life for printed circuit boards, household appliances, leisure electronics, heating and control technology as well as in assembly techniques. Transformers for special requirements with lower open-circuit (no-load) loss capacity are also available in the range.

absolutely short-circuit-proof

minimal size

test certifications to ENEC 10-, VDE, UL- and CSA-regulations

vaccum encapsulated, bobbin with dual chamber windings

temperature class ta 40°C/F and ta 70°C/F

high electrical safety and long service-life properties


individually tested with certificate

excellent temperature fluctuation resistance properties


self-extinguishing cast housing and sealing material




Article no. BV	Output ta 40°C/F	prim.V	Connecting pins	Operating point sec. ± 5%	Connecting pins	No-load voltage V ± 5%
BV EI 302 2025	1,5	230	1-5	2x6 V 125 mA	6-7/9-10	8,2/8,2

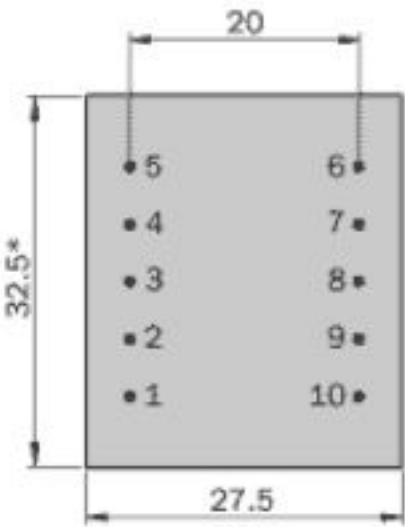

Ansicht auf die Stifte

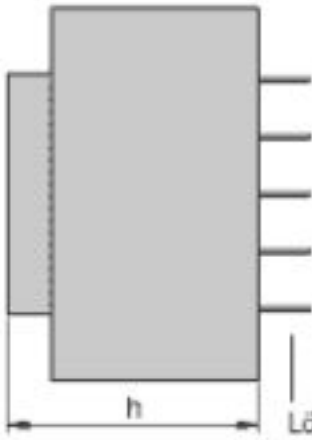

Lötstift 0,6x0,8/
Rundpin ø0,8

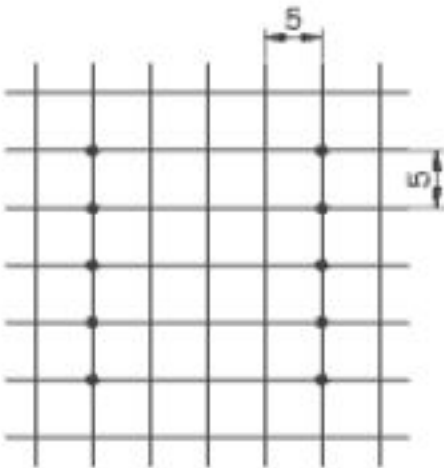

Maße ohne Toleranzangabe ± 0,3 mm,
Ausführungsänderungen vorbehalten

Dimensions with no indication of tolerances ± 0,3mm.