



HAHN - Elektrobau GmbH & Co. KG

Bellersheimerstraße 45
35410 Hungen
Germany

phone: +49 (0) 6402/808-0
fax: +49 (0) 6402/808-60
email: info@hahn-trafo.de

Data sheet: BV EI 601 1042


Frame size/Core height	Output (ta 70B)	h 1 (mm)	h 2 (mm)	weight kg
EI 601 /21,0 mm	20 VA	34,0 ± 0,5	44,7 ± 0,5	0,600

- output up to 20 VA
- excellent temperature fluctuation resistance properties
- non short-circuit-proof at temperature class ta 70 °C/B
- minimum size, maximum capacity
- Type "KK" cast housing with 4 fixing straps
- self-extinguishing cast housing and sealing material
- maximum safety and long-term durability
- individually tested with certificate

Article no. BV	Output ta 70°C/B	prim.V	Connecting pins	Operating point sec. ± 5%	Connecting pins	No-load voltage V ± 5%
EI 601 1042	20	230	1 - 7	2 x 9 V 1111 mA	8-9/13-14	2 x 10,5

**Primary protection by means of transformer heat coils to IEC 127 Standards or
secondarily with PTC resistances.**

Certificates

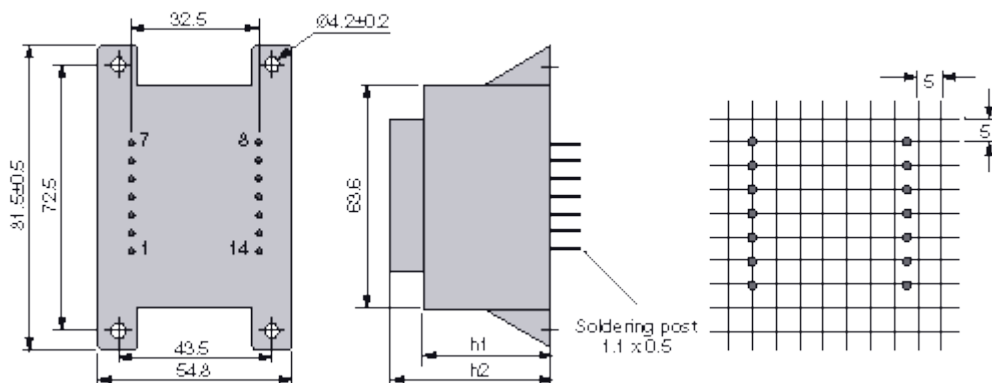

Dimensions of drawing without tolerances ± 0,3 mm.