


BC44-□□-1

RoHS
Compliant

□□ : Poles

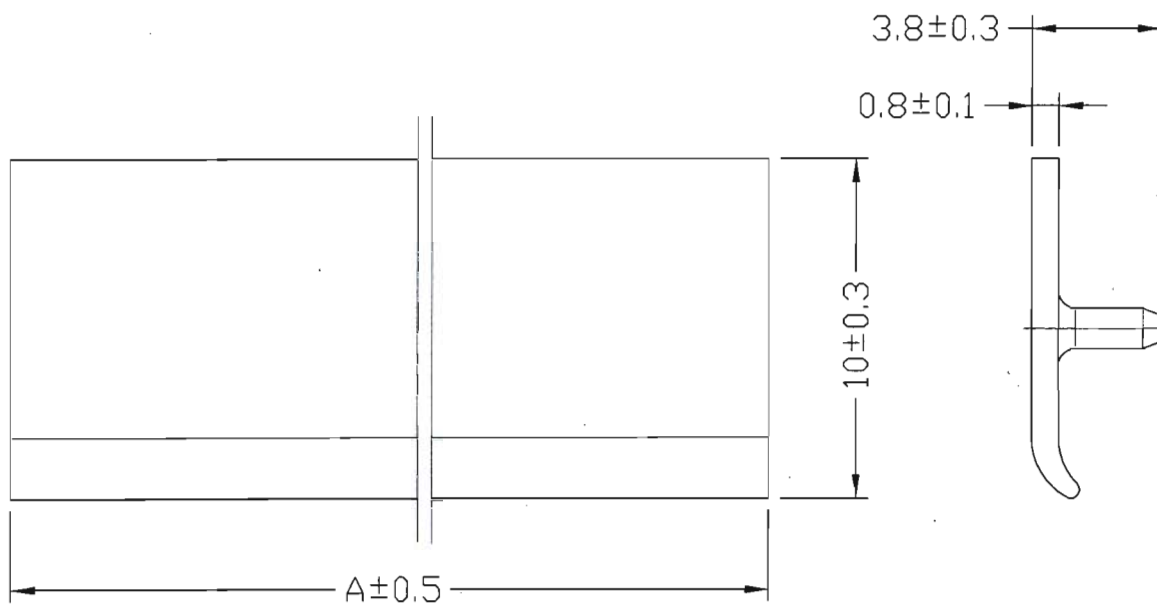


Pitch : 9.50mm

Poles	A(mm)	B(mm)	C(mm)
2	22.20	20.20	9.50
3	31.70	29.70	19.00
4	41.20	39.20	28.50
5	50.70	48.70	38.00
6	60.20	58.20	47.50
7	69.70	67.70	57.00
8	79.20	77.20	66.50
9	88.70	86.70	76.00
10	98.20	96.20	85.50
11	107.70	105.70	95.00
12	117.20	115.20	104.50
13			
14			

DECA
SwitchLab

Switchlab INC.

CONFIRMED & ACCEPTED BY



	Material	Plating/Finish	Remark
1	Cover	PC	
2			
3			
4			

PART NO.	BC44-xx-1	VERSION	A	CONFIRMED BY	<i>Madon R</i>
SHEET OF	2/2	METRIC	MM	DRAWN BY	<i>S-j</i>
				DATE	2009/08/27
				GENERAL MANAGER	<i>gellix</i>

單據編號 : QR-0703-08 版次 : A版

SABIC
Innovative
Plastics™

سابك
sabic

Product Quality Documentation

Certificate of Compliance

No38549

Material (Grade and Color)

940A - 116

Lot Number

785461

Material Produced at

SABIC Innovative Plastics
Singapore Pte. Ltd

Customer Order Number
785461

Customer Part Number

Requisition Number

Quantity

UOM
Kg

Date Shipped
10-08-2008

Comments

It is hereby certified that the product indicated above confirms to our
standard internal specification for the standard conditions of sale.

General QC Items

<u>Name of Test</u>	<u>Standard</u>	<u>UOM</u>	<u>Result</u>	<u>LSL</u>	<u>USL</u>
MFR	ASTM D1238	g/10 min	10.12	8.30	12.10

Product Audit Items

<u>Name of Test</u>	<u>Standard</u>	<u>UOM</u>	<u>Result</u>	<u>LSL</u>	<u>USL</u>	<u>Audit Reference</u>
Izod Impact	ASTM D256	J/M	807.7		1015.00	783559
HDT	ASTM D648	degC	129.6	100.00		783559
FS	ASTM D790	MPa	95.7	35.00		783559
SG	ASTM D792	g/cm3	1.19	1.10		783559
TS	ASTM D638	MPa	61.5	40.00		783559
FM	ASTM D790	MPa	2293	1688.00		783559

Victo, Pow Kau Chek

QA Manager

SABIC Innovative Plastics Singapore Pte Ltd.,

Company Registration No.199001615N

Date of Issue: 10/08/2008

* Trademark of SABIC Innovative Plastics IP B.V.



QMFZ2 Component - Plastics

Friday, October 24, 2003

E161684

SABIC INNOVATIVE PLASTICS SINGAPORE PTE LTD
SINGAPORE - RESIN 23 BENOI RD SINGAPORE 629895 SG

Material Designation: **940A, 920A, ML7408, 940ASR**

Product Description: Polycarbonate (PC), flame retardant, designated "Lexan" furnished as pellets.

Color	Min. Thick. (mm)	Flame Class	HWI	HAI	RTI Elec	RTI Imp	RTI Str	IEC GWIT	IEC GWFI
ALL	1.5	V-2	3	1	130	120	125	-	-
	2.3	V-2	3	-	130	120	125	-	-
	3.0	V-0	2	3	130	120	130	-	-

CTI: 2 IEC CTI (V): - HVTR: 3 D495: 7 IEC Ball Pressure (°C): -

Dielectric Strength (kV/mm): 39

Volume Resistivity (10^x ohm-cm): 16

Dimensional Stability(%): 0

ISO Tensile Strength (MPa): -

ISO Flexural Strength (MPa): -

ISO Heat Deflection (°C): -

ISO Tensile Impact (kJ/m²): -

ISO Izod Impact (kJ/m²): -

ISO Charpy Impact (kJ/m²): -

NOTE Material designations may be followed by suffix numbers and or letters.

Report Date: 12/2/1994

Underwriters Laboratories Inc®

UL94 small-scale test data does not pertain to building materials, furnishings and related contents. UL 94 small-scale test data is intended solely for determining the flammability of plastic materials used in components and parts of end-product devices and appliances, where the acceptability of the combination is determined by ULI.