

SLA BATTERY—STANDARD SERIES

Specification

Nominal Voltage	6V
Number of cell	3
Nominal Capacity	1.3Ah@20hr-rate (0.065A to 1.80V/cell @25°C)
Weight	Approx.310g
Terminal	F1
Container Material	ABS (UL94-HB), Flammability resistance of UL94-V1 can be available upon request.
Rated Capacity	1.3Ah 20hr-rate (0.065A to 1.80V/cell @25°C)
	1.26Ah 10hr-rate (0.126A to 1.80V/cell @25°C)
	1.14Ah 5hr-rate (0.228A to 1.75V/cell @25°C)
	0.92Ah 1hr-rate (0.920A to 1.60V/cell @25°C)
Max. Discharge Current	19.5A(5sec)
Internal Resistance	Approx.52mΩ(Fully charged)
Operating Temp. Range	Discharge: -20°C~50°C
	Charge : -10°C~50°C
	Storage : -20°C~40°C
Cycle Use	Charging Current: ≤0.39A
	Voltage: 7.3V~7.4V
	Temperature compensation: -30mV/°C
Standby Use	Charging Current: No limit
	Voltage: 6.8V~6.9V
	Temperature compensation: -20mV/°C
Self-Discharge	less than 3% at 25°C
Design Life	6 years (floating charge)



Introduction



The MOTOMA standard series batteries designed with 6 years or more service life for general purpose, which designed with advanced technology, super heavy duty grid, high performance plates and electrolyte. The standard series batteries have long and reliable standby life and high consistency for better performance in series usage.

Applications

- ◆ Auto control system & ATM machine
- ◆ Electronic apparatus and equipment
- ◆ Emergency light & Emergency backup power supply & Alarm/Security system
- ◆ Power generation system (solar and wind power system, etc.)
- ◆ Communication power & DC power
- ◆ Electric Power System (EPS)
- ◆ Uninterruptable Power System (UPS)
- ◆

Dimensions

Length	97±1mm (3.82 inches)
Width	24±1mm (0.94 inches)
Height	52±1mm (2.05 inches)
Total Height	58±1mm (2.28 inches)

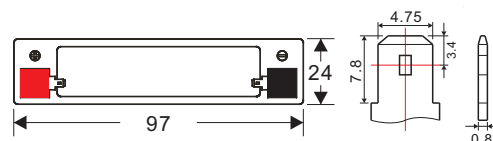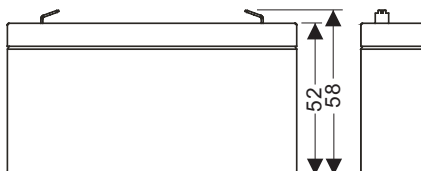

Unit: mm


Constant Current Discharge Characteristics: A (25°C)

F. V/Time	5min	10min	15min	30min	1h	2h	3h	4h	5h	8h	10h	20h
1.60V/cell	5.263	3.518	2.705	1.563	0.925	0.482	0.341	0.280	0.232	0.154	0.133	0.075
1.65V/cell	5.073	3.381	2.618	1.539	0.919	0.479	0.340	0.278	0.231	0.153	0.132	0.072
1.70V/cell	4.799	3.276	2.558	1.527	0.913	0.477	0.338	0.277	0.229	0.153	0.130	0.071
1.75V/cell	4.335	3.066	2.425	1.492	0.899	0.472	0.337	0.276	0.228	0.152	0.129	0.068
1.80V/cell	3.872	2.857	2.290	1.456	0.886	0.463	0.334	0.274	0.226	0.151	0.126	0.065
1.85V/cell	3.412	2.647	2.157	1.420	0.874	0.457	0.332	0.273	0.225	0.151	0.125	0.064


Constant Power Discharge Characteristics: W (25°C)

F. V/Time	5min	10min	15min	30min	1h	2h	3h	4h	5h	8h	10h	20h
1.60V/cell	57.56	37.42	30.40	18.76	11.09	5.777	4.085	3.342	3.269	1.850	1.575	0.880
1.65V/cell	56.06	37.38	29.97	18.45	11.06	5.742	4.077	3.334	3.245	1.835	1.558	0.848
1.70V/cell	54.94	36.26	29.28	18.33	11.03	5.729	4.069	3.334	3.236	1.832	1.542	0.832
1.75V/cell	49.65	34.76	27.76	17.89	10.85	5.638	4.045	3.310	3.228	1.828	1.526	0.799
1.80V/cell	44.35	32.52	26.22	17.47	10.67	5.562	4.013	3.286	3.220	1.820	1.502	0.775
1.85V/cell	39.06	30.28	24.70	17.05	10.48	5.478	3.982	3.262	3.212	1.820	1.478	0.751


Discharge Characteristics Curve

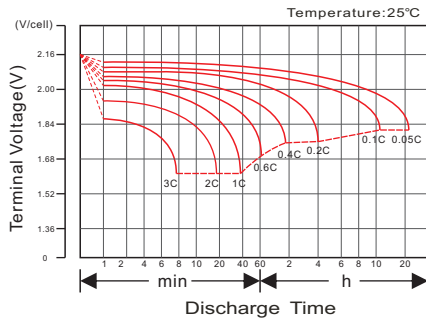


Charging Characteristics Curve

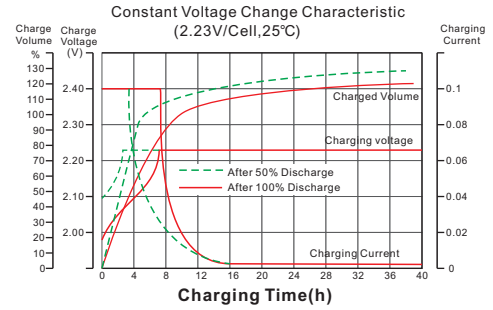


Cycle life in relation to depth of Discharge

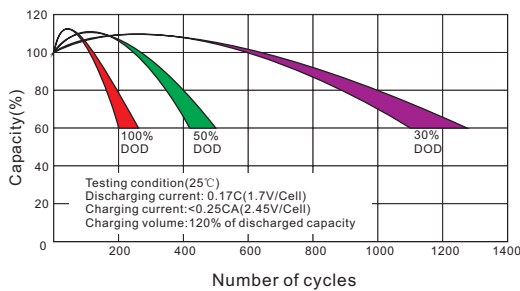


Temperature effects on Capacity

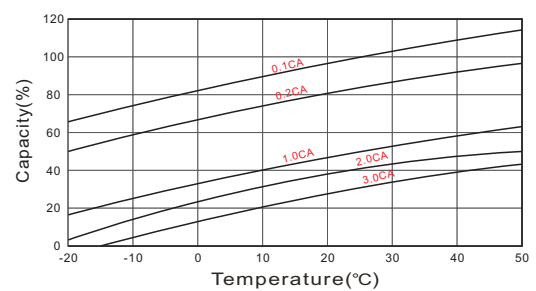


Relationship between charging voltage and temperature

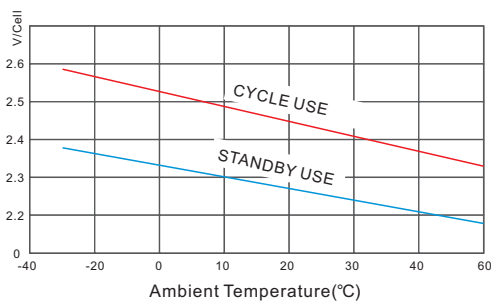

Self-discharge Characteristics

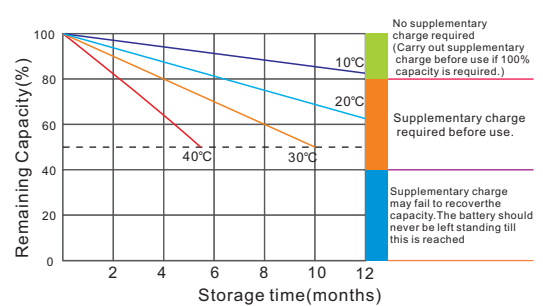

Temperature effects on Float life

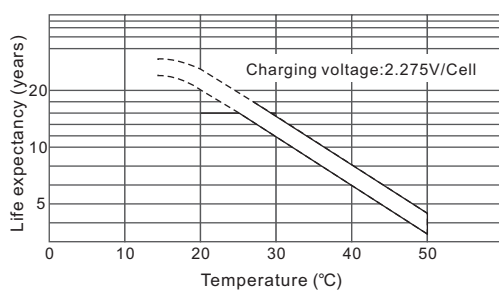

Life Characteristics of Standby use

