LOUDITY

SPECIFICATION SHEET


Туре	Unit	LD-BZPG-2412
Rated voltage	V	12
Operating Voltage	V	3-16
*Rated Current(MAX)	mA	8
* Min Sound Output at 30 cm	dB	90
*Resonant Frequency	Hz	3700 ± 500
Tone Nature		single
Lead Pin Material		Red Copper
Operating Temperature	° C	-20 +60
Storage Temperature	° C	-20 +70
Weight	g	6


*Value Applying at Rated Voltage(DC).

DIMENSIONS

UNIT:mm

Tolerance: ± 0.5 mm

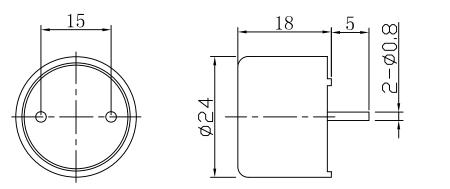



Housing material: ABS Wave solder and wash not allowed.