

ATTENTION
OBSERVE PRECAUTIONS
FOR HANDLING
ELECTROSTATIC
DISCHARGE
SENSITIVE
DEVICES

Part No./型号: PLCC2KYCT


1、Features/特 征:

- I Emitting Color/发光颜色: Yellow/黄色
- I Lens Type/封装特性: Water Clear/无色透明
- I Device Outline/外形特征: $3.5 \times 2.8 \times 1.9\text{mm}$



2、Applications/应 用:

- I Backlight for Mobile, Machine Vision, LCD Display/手机、电话、显示屏背光源
- I Backlight in Dashboard and switch of Automotive/汽车仪表盘、记程器背光源


3、Outline Dimensions/产品外形尺寸:

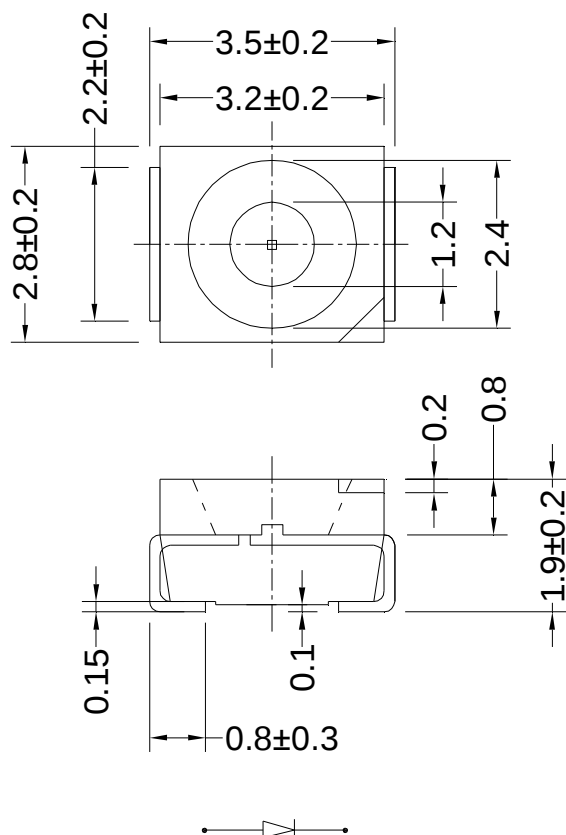

被推荐的焊盘尺寸

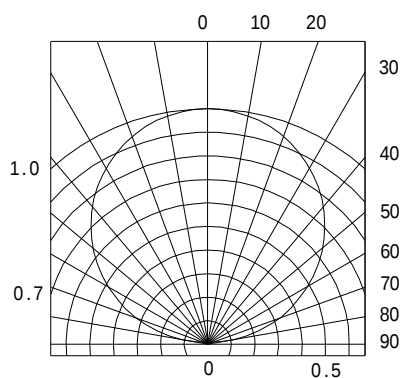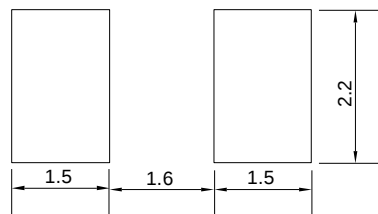


SPATIAL DISTRIBUTION

**4、Absolute maximum ratings/极限参数 (Ta = 25℃):**

Parameter 参数	Symbol 符号	Test Condition 测试条件	Value 参数		Unit 单位
			Min.	Max.	
Power Dissipation 损耗功率	Pd	—	—	60	mW
Reverse Voltage 反向电压	VR	IR = 30 μ A	5	—	V
Pulse Current 正向峰值电流	IFp	Duty=0.1, 1kHz	—	100	mA
Forward Current 正向工作电流	IFm	—	—	25	mA
Operating Temperature 工作温度范围	Topr	—	-40	+85	℃
Storage Temperature 储存温度范围	Tstr	—	-40	+85	℃

5、Electrical and optical characteristics/光电参数 (Ta = 25℃):

Parameter 参数	Symbol 符号	Test Condition 测试条件	Value 参数			Unit 单位
			Min.	Typ.	Max.	
Forward Voltage 正向电压	VF	IF = 20mA	—	2.0	2.4	V
Reverse Current 反向电流	IR	VR = 5V	—	—	30	μ A
Dominate Wavelength 主波长	λ_d	IF = 20mA	584	589	594	nm
Peak Wavelength 峰值波长	λ_p	IF = 20mA	—	591	—	nm
Spectral Line half-width 半波宽度	$\Delta \lambda$	IF = 20mA	—	15	—	nm
Luminous Intensity 发光强度	IV	IF = 20mA	102	170	—	mcd
Viewing Angle 发光指向角	2 θ 1/2	IF = 20mA	—	120	—	Deg.



6、Typical electrical/optical characteristic curves/光电特性曲线:

Fig.1 正向电流 Vs. 正向电压

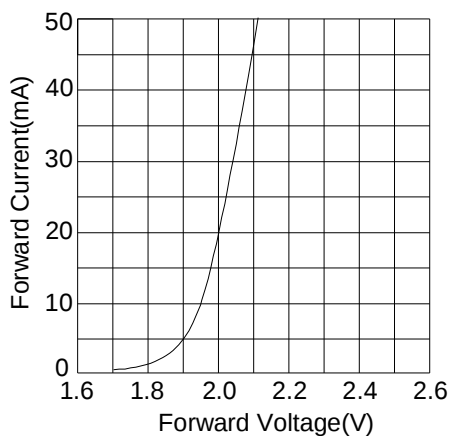


Fig.2 相对亮度 Vs. 正向电流

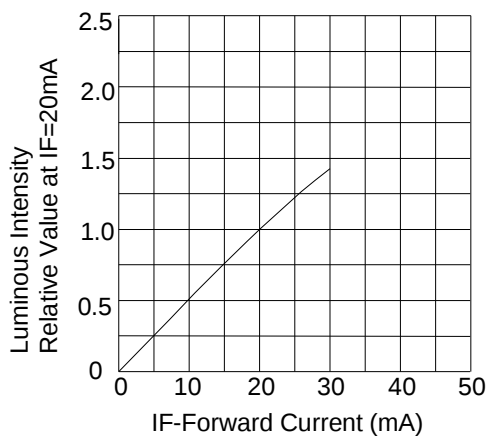


Fig.3 正向电流 Vs. 环境温度

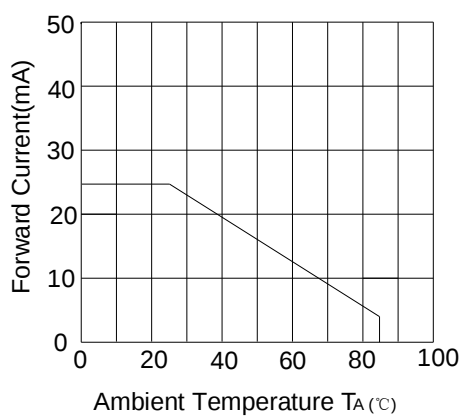
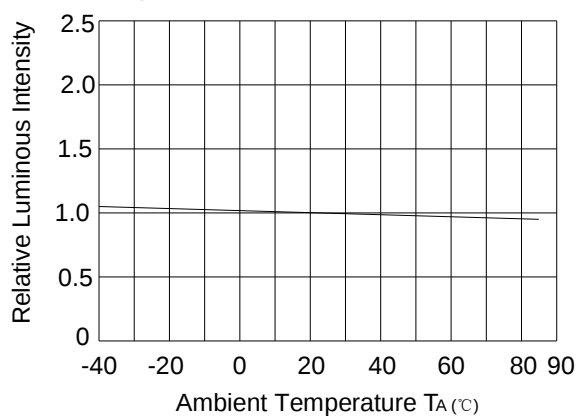


Fig.4 相对亮度 Vs. 环境温度






Fig.5 相对亮度 Vs. 波长

