

#### Specifications:


Contact Resistance: 10mΩ ,max.at DC 100 mA  
Insulator Resistance: 500MΩ ,min.at DC 500V  
Current Rating: 1AMP

#### Dielectric Withstanding

Voltage: AC 500V For 1 minute

Contact: Brass

Housing: PBT &30% Glass Fiber(UL 94V-0)

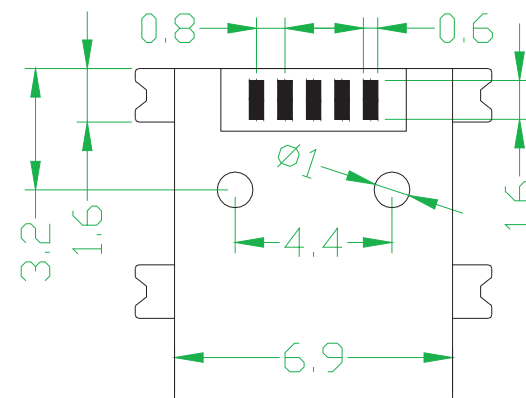

## PCB LAYOUT