


序号/RevNo.	名称/Title	文件编号/File No.
1	123塑件主体	QJ/XYT-11135
2	123塑件后盖	QJ/XYT-11136
3	123端子	QJ/XYT-11137

Specifications:
Contact Resistance: 30mΩ max.at DC 100 mA
Insulator Resistance: 1000MΩ min.at DC 500V
Current Rating: 1AMP

Dielectric Withstanding
Voltage: AC 500V For 1 minute
Operating Temperature:-55°C--+105°C
Contact: Phosphor bronze
Housing: PBT &30% Glass Fiber(UL 94V-0)

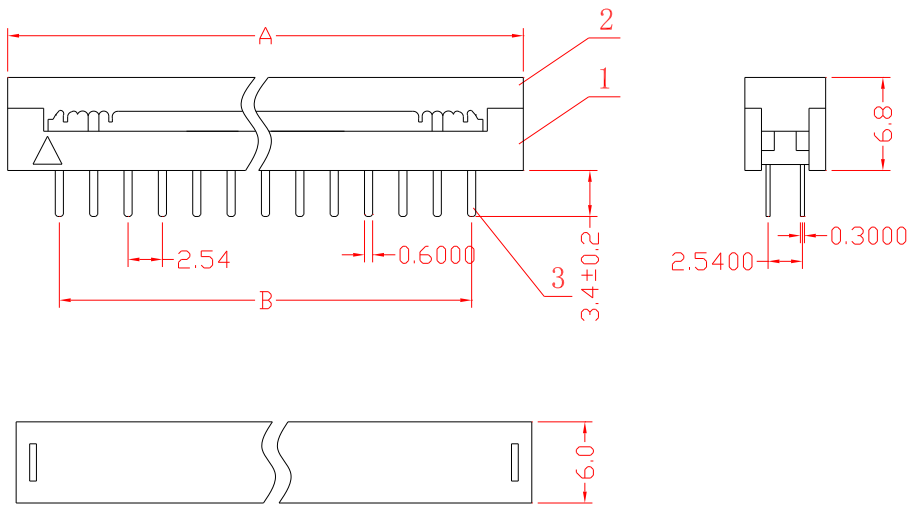

Position	A	B
10	17.80	10.16
14	22.82	15.24
16	25.40	17.78
20	30.52	22.86
26	38.12	30.48
30	43.32	35.56
34	48.40	40.64
40	55.92	48.26
50	68.72	60.96
60	81.42	73.66
64	86.38	78.74

序号/RevNo.	更改记录/Revision note	签名/Signature	日期/Date
-----------	--------------------	--------------	---------

设计/Designed by	绘图/Drawing by	审核/Checked by	批准/Approved by	未注公差 General Tolerance
 新亚联合科技 XINYA UNITED TECH CO.,LTD.	123产品图	图名/Title	文件编号/File No.	x. ±0.2 x.' ±2° .x ±0.1 .x' ±1° .xx ±0.05 .xx' ±0.5° .xxx ±0.01
		123产品图	QJ/XYT-12054	
			页序/Sheet	
		备注 /Remark		单位/units: mm