



228C NEGATIVE

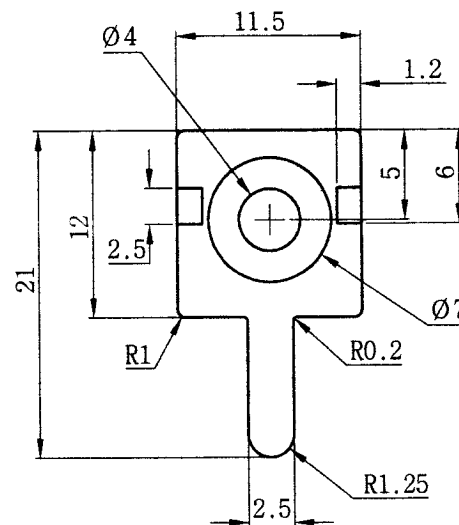

228C POSITIVE

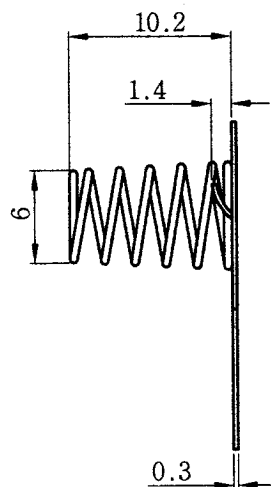


NOTE:

CONTACT WITH SPRING FOR 1.5V BATTERY
CONTACT: 0.3MM TK STEEL NICKEL PLATED

SPRING : Ø0.5MM 65C SPRING WIRE

NICKEL PLATED

ROHS COMPLIANT

3		
2		
1		
NO.	MODIFICATION	DATE
 THIRD ANGLE PROJOTION		



COMFORTABLE ELECTRONIC CO.LTD.

NAME	BATTERY CONTACT: 228C		
SCALE	2:1	APPD	張 艳 明 9/22
UNIT	MM	CHKD	張 艳 明 9/22.06
MAT'L	AS NOTE	DWN	SONGLIPIN
DATE	SEP. 22. 2006	DR NO	D2-228C-0906