

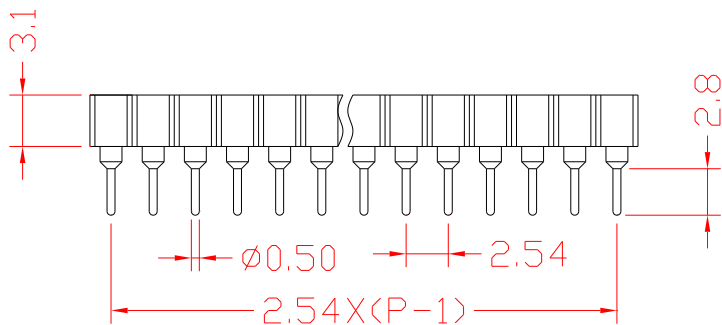


| 序号/RevNo. | 名称/Title | 文件编号/File No. |
|-----------|----------|---------------|
| 1 | 131塑料件 | QJ/XYT-11151 |
| 2 | 126端子 | QJ/XYT-11144 |

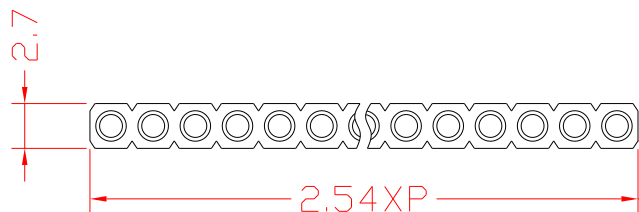

Specifications:

Contact Resistance: 30mΩ max.at DC 100 mA
Insulator resisitance: 1000MΩ min.at DC 500V
Current Rating: 1AMP

Dielectric Withstanding

Voltage: AC 500V For 1 minute
Operating Temperature:-55°C--+105°C
Contact: Brass or phosphor bronze
Housing: PBT &30% Glass Fiber(UL 94V-0)

要求:

1. 塑料件无裂痕。
2. 整排针成一直线，相邻针之间相互平行。