

Compact splicing connector; 5-conductor terminal block; with operating levers; max. continuous service temperature 85°C

Item No.: 222-415



Compact splicing connector; 5-conductor terminal block; with operating levers; max. continuous service temperature 85°C

Marking

RoHS ✓
Compliant

Business data

Supplier	WAGO
Item no.	222-415
GTIN / EAN	4044918464956
Content	1
Order amount	40
Customer item number	

Notes

Technical data


Miscellaneous

Total number of connection points	5
Total number of potentials	1
Color	gray
Rated voltage (II / 2) [V]	400 [V]
Rated surge voltage (II / 2) [kV]	4 [kV]
Nominal current [A]	32 [A]
Connection technology	CAGE CLAMP®
Number of connection points	5

Technical data	
Actuation type	Push-in
Connectable conductor materials	Kupfer
Solid sizes	0.08 ... 2.5 mm ² / 28 ... 12 AWG
stranded, connectable	0.08 ... 2.5 mm ² / 28 ... 12 AWG
Fine-stranded wires	0.08 ... 4 mm ² / 28 ... 12 AWG
Strip length	9 ... 10 mm / 0.35 ... 0.39 in
Type of wiring	Side-entry wiring
Fire load [MJ]	0.13 [MJ]
Weight [g]	6.58 [g]
Width	26.6 mm / 1.047 in
Height	14.5 mm / 0.571 in
Length	20.5 mm / 0.807 in
Safety information 1	In grounded power lines

Images & drawings



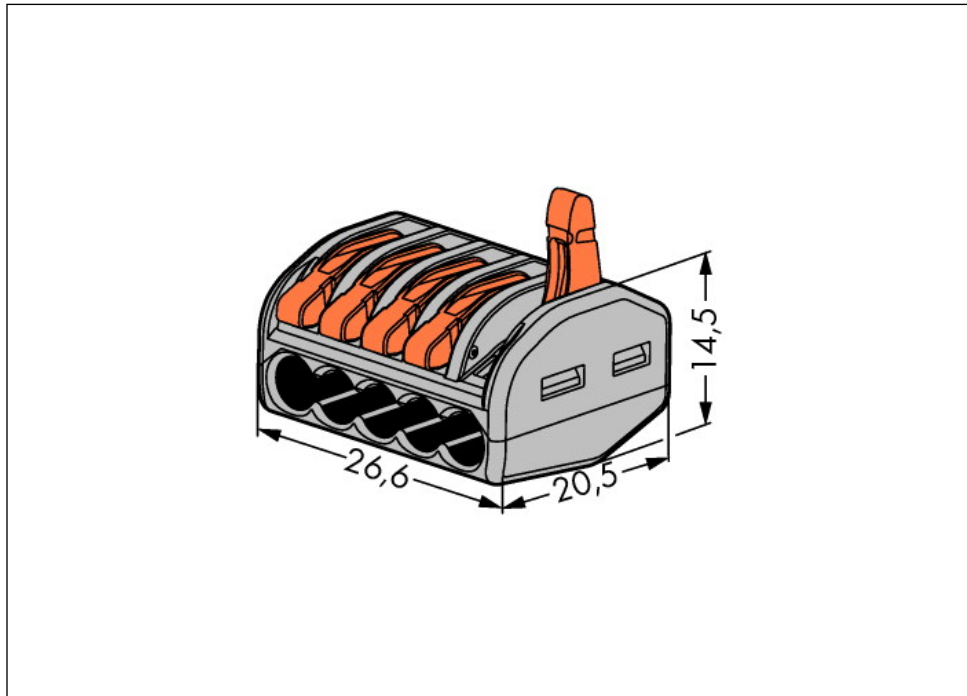

Address

WAGO Kontakttechnik GmbH & Co. KG

Hansastr. 27

32423 Minden

Telefon: 0571/887-0

Fax: 0571/887-169

<http://www.wago.com>

© WAGO Kontakttechnik GmbH & Co. KG

Technische Änderungen und Irrtümer vorbehalten.